


CEE Wall mounted plugs

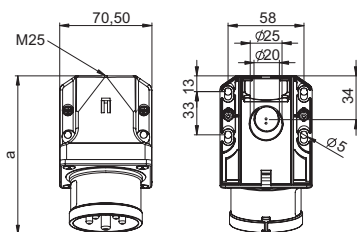


angle=15°

Wall mounted plug IP44

	16 Amp			32 Amp		
Poles	3	4	5	3	4	5
a [mm]	120	121	122	131	131	132
Height [mm]	76	76	79	82	82	85
M [mm]	25	25	25	25	25	25
Wire flexible [mm²]	1-2,5			2,5-6		
Wire solid [mm²]	1-4			2,5-10		
Contact screws [Ncm]	100			110		
Weight [g]	173	188	205	212	232	253

- with screw terminals
- housing material: PA6
- contacts: brass
 - to order nickel-plated contacts please add a "v" e.g. 515-6v
- top and rear entry
- incl. threaded cable grommet

IP44 splashproof

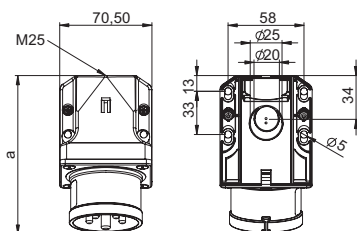


angle=15°

Wall mounted plug IP44 TT

	16 Amp		32 Amp	
Poles	3	5	4	5
a [mm]	120	122	131	132
Height [mm]	76	79	82	85
M [mm]	25	25	25	25
Wire flexible [mm²]	1-2,5		2,5-6	
Wire solid [mm²]	1-4		2,5-10	
Weight [g]	176	209	238	261

- screwless connection technology
- housing material: PA6
- contacts: brass
 - to order nickel-plated contacts please add a "v" e.g. 515-6TTv
- top and rear entry
- incl. threaded cable grommet

IP44 splashproof

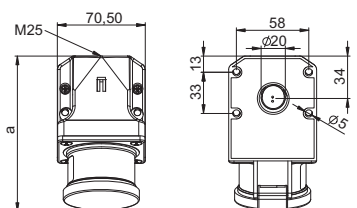


angle=15°

Wall mounted plug with lid IP44

	16 Amp			32 Amp		
Poles	3	4	5	3	4	5
a [mm]	127	128	128	137	137	140
Height [mm]	92	94	97	99	99	104
M [mm]	25	25	25	25	25	25
Wire flexible [mm²]	1-2,5			2,5-6		
Wire solid [mm²]	1-4			2,5-10		
Contact screws [Ncm]	100			110		
Weight [g]	230	245	263	272	292	316

- with screw terminals
- with hinged lid
- housing material: PA6
- contacts: brass
 - to order nickel-plated contacts please add a "v" e.g. 515-6dv
- top and rear entry
- incl. threaded cable grommet

IP44 splashproof

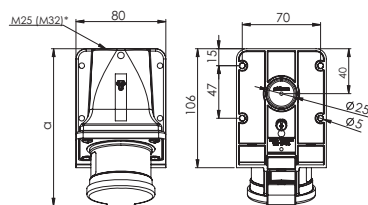

angle=15°

Wall mounted plug with lid IP44

	16 Amp		32 Amp	
Poles		5		5
a [mm]		141		151
Height [mm]		99		112
M* [mm]		25		25
Wire flexible [mm²]	1-2,5		2,5-6	
Wire solid [mm²]	1-4		2,5-10	
Contact screws [Ncm]	100		110	
Weight [g]		257		310

- with screw terminals
- **one-piece housing**
- with hinged lid
- housing material: PA6
- contacts: brass
 - to order nickel-plated contacts please add a "v" e.g. 515-6kdv
- top and rear entry
- incl. threaded cable grommet

IP44 splashproof

*M32 optional on request available

			110V~ 50/60Hz 4h	230V~ 50/60Hz 3p=6h 4p+5p=9h	400V~ 50/60Hz 3p=9h 4p+5p=6h	500V~ 50/60Hz 7h	>50- 500V~ 100-300Hz 10h	>50V others 1h
	Amp.	Poles	pack. unit	Cat.No.	Cat.No.	Cat.No.	Cat.No.	Cat.No.
	16	3	10	513-4	513-6	513-9	513-7	513-10
	16	4	10	514-4	514-9	514-6	514-7	514-10
	16	5	10	515-4	515-9	515-6	515-7	515-10
	32	3	10	523-4	523-6	523-9	523-7	523-10
	32	4	10	524-4	524-9	524-6	524-7	524-10
	32	5	10	525-4	525-9	525-6	525-7	525-10



515-6

	16	3	10	513-4TT	513-6TT	513-9TT		
	16	5	10	515-4TT	515-9TT	515-6TT		
	32	4	10	524-4TT	524-9TT	524-6TT		
	32	5	10	525-4TT	525-9TT	525-6TT		



515-6TT

	16	3	10	513-4d	513-6d	513-9d	513-7d	513-10d
	16	4	10	514-4d	514-9d	514-6d	514-7d	514-10d
	16	5	10	515-4d	515-9d	515-6d	515-7d	515-10d
	32	3	10	523-4d	523-6d	523-9d	523-7d	523-10d
	32	4	10	524-4d	524-9d	524-6d	524-7d	524-10d
	32	5	10	525-4d	525-9d	525-6d	525-7d	525-10d



515-6d

	16	5	10	515-4kd	515-9kd	515-6kd	515-7kd	515-10kd
	32	5	10	525-4kd	525-9kd	525-6kd	525-7kd	525-10kd




525-6kd

Accessories see page 50



CEE Wall mounted plugs

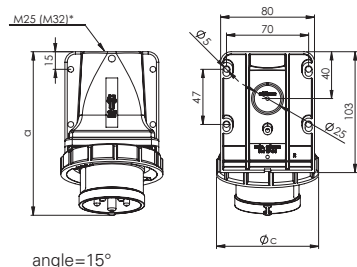


Wall mounted plug IP67

Poles	16 Amp			32 Amp		
	3	4	5	4	5	
a [mm]	136	138	140	150	153	152
Height [mm]	99	94	100	104	104	102
c [mm]	71	79	87	93	93	102
M* [mm]	25	25	25	25	25	25
Wire flexible [mm ²]	1-2,5			2,5-6		
Wire solid [mm ²]	1-4			2,5-10		
Contact screws [Ncm]	100			110		
Weight [g]	200	223	242	260	280	306

- with screw terminals
- housing material: PA6
- contacts: brass
 - to order nickel-plated contacts please add a „v“ e.g. 5152-6kv
- top or rear entry
- incl. threaded bung

IP67 watertight

*M32 optional on request available

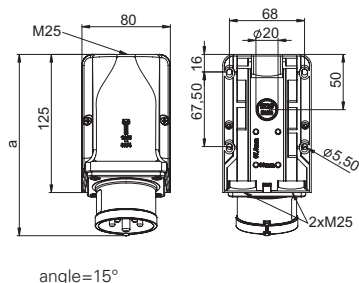


Wall mounted plug IP44

Poles	16 Amp			32 Amp		
	3	4	5	3	4	5
a [mm]	163	163	164	173	173	174
Height [mm]	109	109	112	115	115	118
M [mm]	3x25	3x25	3x25	3x25	3x25	3x25
Wire flexible [mm ²]	1-2,5			2,5-6		
Wire solid [mm ²]	1-4			2,5-10		
Contact screws [Ncm]	100			110		
Weight [g]	263	278	295	302	322	341

- with screw terminals
- for wiring through
- housing material: PA6
- contacts: brass
 - to order nickel-plated contacts please add a "v" e.g. 9515-6v
- top, 2x bottom or rear entry
- incl. threaded cable grommet

IP44 splashproof

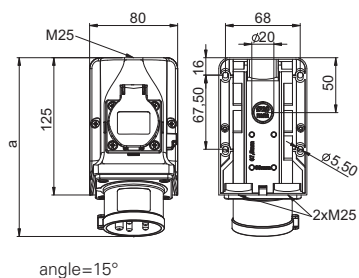


Wall mounted plug - COMBO IP44

	16 Amp			32 Amp		
Poles	3		5	3		5
a [mm]	162		163	172		173
Height [mm]	117		117	117		118
M [mm]	3x25		3x25	3x25		3x25
Wire flexible [mm²]	1-2,5			2,5-6		
Wire solid [mm²]	1-4			2,5-10		
Contact screws CEE [Ncm]	100			110		
Screw terminals [Ncm]	120					
Weight [g]	367		399	422		463

- with screw terminals
- wall mounted plug with integrated safety socket acc. Austr./Germ. system
- connecting terminals up to 10mm²
- **ready wired**
 - for plug 32A the safety socket is protected by fuse (10A slow)
- housing material: PA6
- contacts: brass
 - to order nickel-plated contacts please add a "v" e.g. 95215-6v
- top, 2x bottom or rear entry
- incl. threaded cable grommet
- special design with Belg./French socket outlet or non wired version are available on request

IP44 splashproof

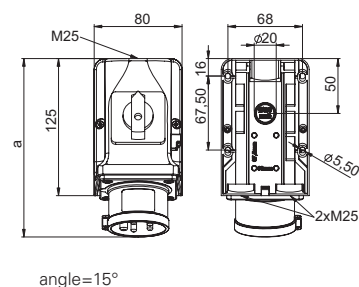

Wall mounted plug with switch IP44

Poles	16 Amp	32 Amp
	5	5
a [mm]	163	173
Height [mm]	128	128
M [mm]	3x25	3x25
Wire flexible [mm ²]	1-2,5	2,5-6
Wire solid [mm ²]	1-4	2,5-10
Weight [g]	474	522

- with screw terminals
- wall mounting plug with integrated ON/OFF switch AC22A
- **prewired**
 - housing material: PA6
- contacts: brass
 - to order nickel-plated contacts please add a "v" e.g. 75615-6v
- top, 2x bottom or rear entry
- incl. threaded cable grommet

IP44 splashproof

Amp.	Poles	pack. unit	110V~	230V~	400V~	500V~	>50-500V~	>50V others
			50/60Hz 4h	50/60Hz 3p=6h 4p+5p=9h	50/60Hz 3p=9h 4p+5p=6h	50/60Hz 7h	100-300Hz 10h	1h
			Cat.No.	Cat.No.	Cat.No.	Cat.No.	Cat.No.	Cat.No.
16	3	5	5132-4k	5132-6k	5132-9k	5132-7k	5132-10k	5132-1k
16	4	5	5142-4k	5142-9k	5142-6k	5142-7k	5142-10k	5142-1k
16	5	5	5152-4k	5152-9k	5152-6k	5152-7k	5152-10k	5152-1k
32	3	5	5232-4k	5232-6k	5232-9k	5232-7k	5232-10k	5232-1k
32	4	5	5242-4k	5242-9k	5242-6k	5242-7k	5242-10k	5242-1k
32	5	5	5252-4k	5252-9k	5252-6k	5252-7k	5252-10k	5252-1k



5252-6k

16	3	5	9513-4	9513-6	9513-9	9513-7	9513-10	9513-1
16	4	5	9514-4	9514-9	9514-6	9514-7	9514-10	9514-1
16	5	5	9515-4	9515-9	9515-6	9515-7	9515-10	9515-1
32	3	5	9523-4	9523-6	9523-9	9523-7	9523-10	9523-1
32	4	5	9524-4	9524-9	9524-6	9524-7	9524-10	9524-1
32	5	5	9525-4	9525-9	9525-6	9525-7	9525-10	9525-1



9515-6

16	3	5	95213-6	95215-6
16	5	5		
32	3	5	95223-6	95225-6
32	5	5		



95225-6



95215-6


16	5	5		75615-6
32	5	5		75625-6



75615-6



CEE Wall mounted plugs




angle=15°

Wall mounted plug IP66/67 **POWER TWIST**

	63 Amp		
Poles	3	4	5
a [mm]	271	271	271
Height [mm]	175	175	175
Wire flexible [mm²]	6-16		
Wire solid [mm²]	6-25		
Contact screws [Ncm]	200		
Weight [g]	812	864	914

- contact frame with screws
- housing material: PC/ABS
- contacts: nickel-plated contacts, with pilot contact (see page 8)
- top, bottom or rear entry
- housing can be rotated by 180°
- incl. threaded bung
- for waterproof cover and cable-glands see accessories page 51

IP66/67 watertight



angle=15°


Wall mounted plug IP66/67 **POWER TWIST**

	125 Amp		
Poles	3	4	5
a [mm]	387	387	387
Height [mm]	209	209	209
Wire flexible [mm²]	16-50		
Wire solid [mm²]	16-70		
Contact screws [Ncm]	450		
Weight [g]	1620	1725	1834

- contact frame with hexagon socket screws
- housing material: PC/ABS
- contacts: nickel-plated contacts, with pilot contact (see page 8)
- top, bottom or rear entry
- housing can be rotated by 180°
- incl. threaded bung
- for waterproof cover and cable-glands see accessories page 51

IP66/67 watertight

CEE Plugs and sockets 1h for Emergency power supply



According to DIN VDE 0100-551 Bbl 1 (VDE 0100-551 Bbl 1):2019-06, emergency power feeds with mobile power generators carried out by electrical engineering amateurs must use **1 o'clock** coded plugs and sockets (**CEE plugs and sockets 400V 5p 1h** up to max. 125A). For this purpose, an appliance plug must be used on the building side as well as the connection cable (plug and coupling) between the power generator and the feed-in with **1h** position.

Amp.	Poles	pack. unit	110V~	230V~	400V~	500V~	>50- 500V~	>50V others
			50/60Hz 4h	50/60Hz 3p=6h 4p+5p=9h	50/60Hz 3p=9h 4p+5p=6h	50/60Hz 7h	100-300Hz 10h	1h
			Cat.No.	Cat.No.	Cat.No.	Cat.No.	Cat.No.	Cat.No.
63	3	1	533-4	533-6	533-9	533-7	533-10	533-1
63	4	1	534-4	534-9	534-6	534-7	534-10	534-1
63	5	1	535-4	535-9	535-6	535-7	535-10	535-1



535-6

	125	3	1	543-4	543-6	543-9	543-7	543-10	543-1
	125	4	1	544-4	544-9	544-6	544-7	544-10	544-1
	125	5	1	545-4	545-9	545-6	545-7	545-10	545-1



545-6

