



DELTA[^]

WALL-MOUNTED DISTRIBUTION BOXES

MADE OF THERMOPLASTIC


		Page
	Sölden Dimensions: HxWxD = 520x297x165mm	269
	Strobl Dimensions: HxWxD = 520x222x140mm	270
	Anif4 Dimensions: HxWxD = 320x222x114mm	271
	Anif7 Dimensions: HxWxD = 320x222x140mm	272
	Lofer7 Dimensions: HxWxD = 255x204x140mm	274
	Lofer4 Dimensions: HxWxD = 255x204x114mm	275
	Opole Dimensions: HxWxD = 355x300x128mm	275
	Murau / Schwaz Dimensions: HxWxD = 255x204x114mm	276
	Lech Dimensions: HxWxD = 230x130x130mm	277



Wall-mounted thermoplastic distribution boxes **DELTA[^]**



DELTA[^] Information

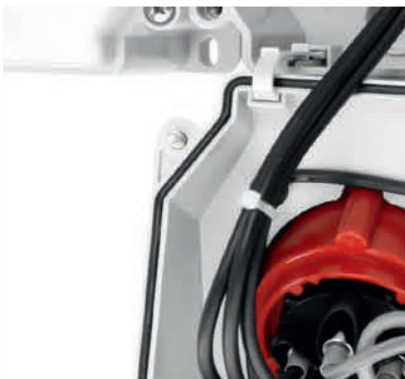

Distribution boxes are suitable for **in- and outdoor areas**. The boxes are available in **different sizes and designs**.

Protection degree: IP54 and IP66/67

The massive and high-quality **enclosure made from PC/ABS** tested and certified according to IEC/EN 62208* provides a wide range of **positive features**. Such as high impact resistance and notched bar impact strength, high thermal stability, dielectric strength, weather, UV and wear resistance, good insulation properties, and resistance against many chemical. The material used is free from cadmium, red phosphor and halogens (fluorine, chlorine, bromine, iodine and astatine).

DELTA series distribution boxes are well suited for all applications. Especially in those areas that depend on high-quality, a robust enclosure and total reliability, such as in industry, trade, workshops, agriculture, household, public buildings, leisure, sport, marinas, camping, etc.

DELTA series products are combinable and can be **arranged in horizontal or vertical** directions. STROBL and ANIF series are especially recommended here. Using this feature, it is possible to achieve individual combination groups of any size with single boxes. In few words, the diversity of variants has almost no limits.


Adjusted to your needs we put together individually tailored and **optimally equipped wall distribution boxes**.

*) IEC/EN 62208:2011

This International Standard applies to empty enclosures as supplied by the enclosure manufacturer before any equipment is installed by the manufacturer of the switchgear assembly.

It defines terms, classifications, characteristics and test requirements for enclosures that may be used for such purposes as for example IEC 61439 series switchgear assemblies with a rated voltage not exceeding 1000V AC or 1500V DC, for general indoor or outdoor installation use.




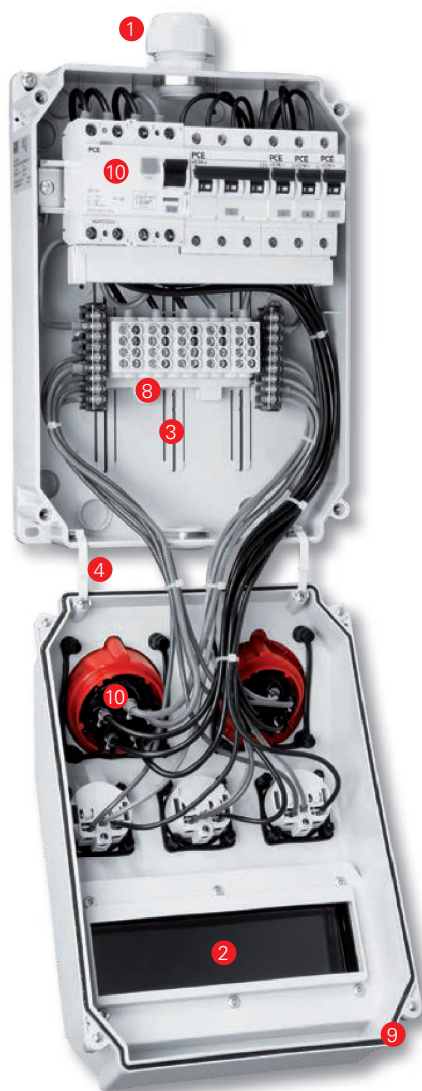

- 1 Cable entries up to max. M63, preferably from the top or bottom.
- 2 PCE hinged windows from 2 to 18 modules can be used in IP54 or IP66/67. The transparent protective, upward opening, cover of the window can be locked and sealed.
- 3 A variable groove shaped rail retention system on the inside floor allows optimum and individual positioning of the fittings, assembly plates, etc.
- 4 The cover and bottom part of the enclosure is connected by a flexible hinge, available in 2 different lengths.
- 5 The enclosures can be optimally adapted to each other thanks to the straight housing walls.
- 6 All external screws are made from stainless steel to resist in especially demanding operating conditions.
- 7 Wall mounting is possible in- or outside the protective area.
- 8 Distribution box ready wired on main terminal
- 9 Use of high-quality foamed* polyurethane seals.
- 10 Any type of switchgears, socket devices, such as CEE sockets 16A 3p to 125A 5p and safety sockets (Austrian/German, French/Belgian, Danish, British or Swiss standards) can be used for assembling.
- 11 Metric thread insert made of brass**.

*) inserted in series Lech

**) with series Lech directly in the plastic




Thermoplastic insulated distribution boxes DELTA[▲] Series SÖLDEN

Series SÖLDEN

- **Socket outlet combination acc. EN 61439**
- Housing made of high durable PC/ABS, compact design
- **Dimensions HxWxD = 520x297x165 mm**
- Switchgear up to 2x14 modules, behind transparent window
- Ready wired for connection
- **IP54** (IP67 on request)

Standard version:

- All outer metal parts made out of stainless steel, captive screws
- Switchgear built in under impact resistant window
- Ready wired on main connecting terminal for wiring through (max. 5x25mm² / 5x16mm² YF)
- Opening for cable gland on top, blind cap on bottom
- CEE-sockets and safety sockets made of PA6, contacts nickel plated, sockets individual exchangeable

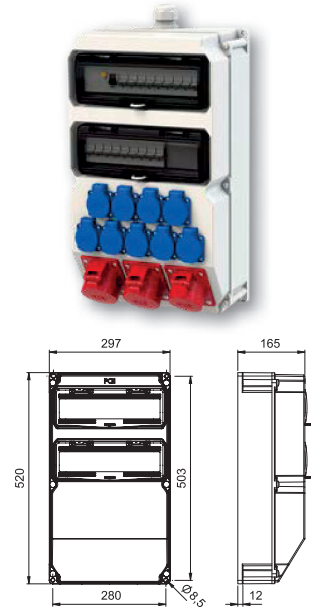


Layout examples: (other combinations on request!)

Layout	CEE 400V 5p			SS 250V	Protection		Connection	InA RDF	Cat.No.
	63A	32A	16A	16A	RCD	MCB			
		1	2	6	1xRCD 63A/4/0.03A (TYPE A 40AT)	1xMCB 32A 3p-C 2xMCB 16A 3p-C 3xMCB 16A 1p-C	1xM32 (hole) top 1xM32 (blind cap) bottom	InA 40A RDF 0,5	9028738
		1	2	9	1xRCD 63A/4/0.03A (TYPE A 63AT)	1xMCB 32A 3p-C 2xMCB 16A 3p-C 9xMCB 16A 1p-C	1xM40 (hole) top 1xM40 (blind cap) bottom	InA 63A RDF 0,5	9028883
		2	2	4	1xRCD 63A/4/0.03A (TYPE A 40AT)	1xMCB 32A 3p-C 1xMCB 16A 3p-C 4xMCB 16A 1p-B	1xM32 (hole) top 1xM32 (blind cap) bottom	InA 40A RDF 0,5	9029541
		2	2	2	1xRCD 63A/4/0.03A (TYPE A 63AT)	2xMCB 32A 3p-C 2xMCB 16A 3p-C 2xMCB 16A 1p-C	1xM32 (hole) top 1xM32 (blind cap) bottom	InA 63A RDF 0,4	9028086
	1	1	1	2	1xRCD 63A/4/0.03A (TYPE B 63AT) only for 16A and 32A outputs	1xMCB 32A 3p-C 1xMCB 16A 3p-C 2xMCB 16A 1p-C	1xM40 (hole) top 1xM40 (blind cap) bottom	InA 63A RDF 0,4	9029153
	1	1	1	4	1xRCD 63A/4/0.03A (TYPE A 63AT) only for 16A and 32A outputs	1xMCB 32A 3p-C 1xMCB 16A 3p-C 4xMCB 16A 1p-C	1xM40 (hole) top 1xM40 (blind cap) bottom	InA 63A RDF 0,4	9029070
	1	1	2	3	1xRCD 63A/4/0.03A (TYPE A 63AT)	1xMCB 32A 3p-C 1xMCB 16A 3p-C 3xMCB 16A 1p-C	1xM40 (hole) top 1xM40 (blind cap) bottom	InA 63A RDF 0,4	9029074

InA= Rated current of switchgear and control gear assembly; RDF = Rated diversity factor

...available on stock!

Thermoplastic insulated distribution boxes **DELTA[▲]** Series STROBL

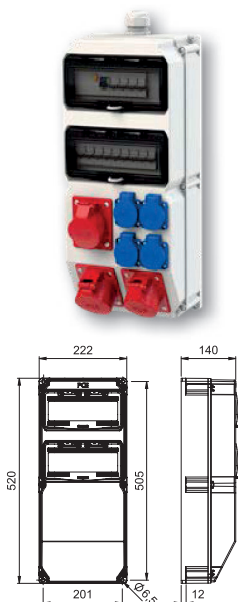

Series STROBL

- **Socket outlet combination acc. EN 61439**
- Housing made of high durable PC/ABS, compact design
- **Dimensions HxWxD = 520x222x140 mm**
- Switchgear up to 2x10 modules, behind transparent window
- Ready wired for connection
- **IP54** (IP67 on request)

Standard version:

- All outer metal parts made out of stainless steel, captive screws
- Switchgear built in under impact resistant window
- Ready wired on main connecting terminal for wiring through (max. 5x25mm² / 5x16mm² YF)
- Opening for cable gland on top, blind cap on bottom
- CEE-sockets and safety sockets made of PA6, contacts nickel plated, sockets individual exchangeable

Layout examples: (other combinations on request!)

Layout	CEE 400V 5p			SS 250V	Protection		Connection	InA RDF	Cat.No.
	63A	32A	16A	16A	RCD	MCB			
			2	4	1xRCD 40A/4/0.03A (TYPE A 25AT)	2xMCB 16A 3p-C 2xMCB 16A 1p-B	1xM32 (hole) top 1xM32 (blind cap) bottom	InA 25A RDF 0,5	9025162
		1	1	2	1xRCD 63A/4/0.03A (TYPE A 40AT)	1xMCB 32A 3p-C 1xMCB 16A 3p-C 2xMCB 16A 1p-B	1xM32 (hole) top 1xM32 (blind cap) bottom	InA 40A RDF 0,6	9025512
		1	1	3	1xRCD 63A/4/0.03A (TYPE A 40AT)	1xMCB 32A 3p-C 1xMCB 16A 3p-C 3xMCB 16A 1p-C	1xM32 (hole) top 1xM32 (blind cap) bottom	InA 40A RDF 0,6	9025575
		1	1	3	1xRCD 63A/4/0.03A (TYPE A 40AT)	1xMCB 32A 3p C 1xMCB 16A 3p C 3xMCB 16A 1p C	1xM32+M20 (hole) top 1xM32 cable gland bottom 1xM20 cable gland with cap CAT6-socket RJ45 double + mounting set separate order	InA 40A RDF 0,6	90251319 + 12k452-0e 12k452-1/4
		1	1	4	1xRCD 63A/4/0.03A (TYPE A 40AT)	1xMCB 32A 3p-C 1xMCB 16A 3p-C 4xMCB 16A 1p-C	1xM32 (hole) top 1xM32 (blind cap) bottom	InA 40A RDF 0,5	9025521
		1	2	2	1xRCD 63A/4/0.03A (TYPE A 40AT)	1xMCB 32A 3p-C 2xMCB 16A 3p-C 2xMCB 16A 1p-B	1xM32 (hole) top 1xM32 (blind cap) bottom	InA 40A RDF 0,5	9025612
		1	2	4	1xRCD 63A/4/0.03A (TYPE B 63AT)	1xMCB 32A 3p-C 2xMCB 16A 3p-C 4xMCB 16A 1p-C	1xM32 (hole) top 1xM32 (blind cap) bottom	InA 63A RDF 0,4	90251023
					1xRCD 63A/4/0.03A (TYPE A 40AT)	1xMCB 32A 3p-C 2xMCB 16A 3p-C 4xMCB 16A 1p-C	1xM32 (hole) top 1xM32 (blind cap) bottom	InA 40A RDF 0,4	9025231
					1xRCD 63A/4/0.03A (TYPE A 63AT)	1xMCB 32A 3p-C 2xMCB 16A 3p-C 4xMCB 16A 1p-C	1xM40 (hole) top 1xM40 (blind cap) bottom	InA 63A RDF 0,5	9025587

InA= Rated current of switchgear and control gear assembly; RDF = Rated diversity factor

...available on stock!


Thermoplastic insulated distribution boxes DELTA[▲] Series ANIF4

Series ANIF4





- **Socket outlet combination acc. EN 61439**
- Housing made of high durable PC/ABS, compact design
- **Dimensions HxWxD = 320x222x114 mm**
- Switchgear up to 10 modules, behind transparent window
- Ready wired for connection
- **IP54** (IP67 on request)

Standard version:

- All outer metal parts made out of stainless steel, captive screws
- Switchgear built in under impact resistant window
- Ready wired on main connecting terminal for wiring through (max. 5x25mm² / 5x16mm² YF)
- Opening for cable gland on top, blind cap on bottom
- CEE-sockets and safety sockets made of PA6, contacts nickel plated, sockets individual exchangeable

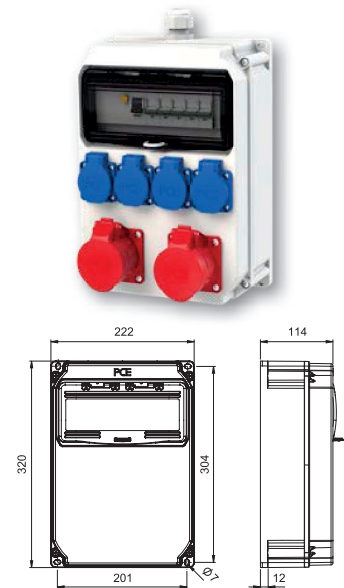

Layout examples: (other combinations on request!)


Layout	CEE 400V 5p			SS 250V	Protection		Connection	InA RDF	Cat.No.
	63A	32A	16A	16A	RCD	MCB			
			2	4		2xMCB 16A 3p-C 4xMCB 16A 1p-B	1xM25 (hole) top 1xM25 (blind cap) bottom	InA 32A RDF 0,5	9134029
		1	1	3		1xMCB 32A 3p-C 1xMCB 16A 3p-C 4xMCB 16A 1p-B	1xM32 (hole) top 1xM32 (blind cap) bottom	InA 40A RDF 0,5	9134227
		1	1	4	1xRCD 63A/4/0.03A (TYPE A 40AT)	1xMCB 16A 3p-C 2xMCB 16A 1p-B	1xM25 (hole) top 1xM25 (blind cap) bottom	InA 32A RDF 0,7	9134520
				CEE 16A 3p 4*	4xRCBO 16A 2p C 30mA TYPE A		1xM25 cable gland (ø13-18mm) bottom 4xCEE-sockets 16A 3p 230V lockable with padlock	InA 32A RDF 0,5	9134194

- 🔒 *Lockable CEE sockets (16A 3p 230V) can be locked with padlock (size 30 or 40mm). Hinged window can also be locked with padlock. Perfectly suited for special occasions! e.g.: camping / marina,...



InA= Rated current of switchgear and control gear assembly; RDF = Rated diversity factor

Thermoplastic insulated distribution boxes **DELTA[▲]** Series ANIF7

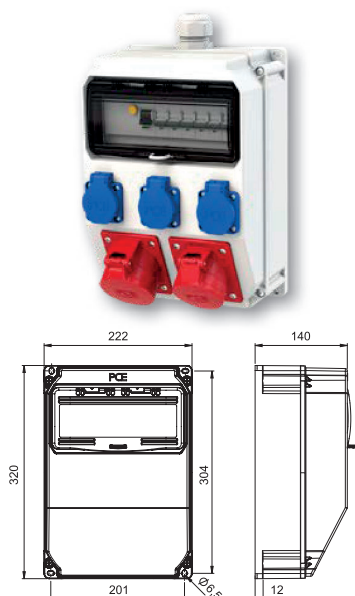

Series ANIF7

- **Socket outlet combination acc. EN 61439**
- Housing made of high durable PC/ABS, compact design
- **Dimensions HxWxD = 320x222x140 mm**
- Switchgear up to 10 modules, behind transparent window
- Ready wired for connection
- **IP54** (IP67 on request)

Standard version:

- All outer metal parts made out of stainless steel, captive screws
- Switchgear built in under impact resistant window
- Ready wired on main connecting terminal for wiring through (max. 5x25mm² / 5x16mm² YF)
- Opening for cable gland on top, blind cap on bottom
- CEE-sockets and safety sockets made of PA6, contacts nickel plated, sockets individual exchangeable









Layout examples: (other combinations on request!)

Layout	CEE 400V 5p			SS 250V	Protection		Connection	InA RDF	Cat.No.
	63A	32A	16A	16A	RCD	MCB			
			1	2	1xRCD 40A/4/0.03A (TYPE A 25AT)	1xMCB 16A 3p-C 2xMCB 16A 1p-B	1xM25 (hole) top 1xM25 (blind cap) bottom	InA 25A RDF 0,7	9135112
			1	2	1xRCD 40A/4/0.03A (TYPE A 25AT)	1xMCB 16A 3p-C 1xMCB 16A 1p-B	1xM25 (hole) top 1xM25 (blind cap) bottom	InA 25A RDF 0,7	9135114
		1	1	2	1xRCD 63A/4/0.03A (TYPE A 40AT)	1xMCB 16A 3p-C 2xMCB 16A 1p-B	1xM32 (hole) top 1xM32 (blind cap) bottom	InA 32A RDF 0,5	9135512
		1	1	2		1xMCB 32A 3p-C 1xMCB 16A 3p-C 2xMCB 16A 1p-C	1xM32 (hole) top 1xM32 (blind cap) bottom	InA 40A RDF 0,6	9135511
			2	2		2xMCB 16A 3p-C 2xMCB 16A 1p-B	1xM32 (hole) top 1xM32 (blind cap) bottom	InA 32A RDF 0,6	9135123
		1		3	1xRCD 63A/4/0.03A (TYPE A 40AT)	1xMCB 32A 3p-C 3xMCB 16A 1p-C	1xM32 (hole) top 1xM32 (blind cap) bottom	InA 40A RDF 0,7	9135136
		2		2		2xMCB 32A 3p-C 2xMCB 16A 1p-B	1xM32 (hole) top 1xM32 (blind cap) bottom	InA 40A RDF 0,5	9135523

InA= Rated current of switchgear and control gear assembly; RDF = Rated diversity factor

Thermoplastic insulated distribution boxes **DELTA[▲]** Series ANIF7

Layout examples: (other combinations on request!)


Layout	CEE 400V 5p			SS 250V	Protection		Connection	InA RDF	Cat.No.
	63A	32A	16A	16A	RCD	MCB			
			1	3	1xRCD 63A/4/0.03A (TYPE A 40AT)	1xMCB 16A 3p-C 3xMCB 16A 1p-C	1xM25 cable gland (ø13-18mm) top 1xM25 (blind cap) bottom	InA 32A RDF 0,7	9135110
			2	3		2xMCB 16A 3p-C 3xMCB 16A 1p-C	1xM25 cable gland (ø13-18mm) top 1xM25 (blind cap) bottom	InA 32A RDF 0,6	9135151
			2	3		2xMCB 16A 3p-C 3xMCB 16A 1p-B	1xM32 (hole) top 1xM32 (blind cap) bottom	InA 40A RDF 0,7	9135153
		1	1	3		1xMCB 32A 3p-C 1xMCB 16A 3p-C 3xMCB 16A 1p-C	1xM32 cable gland (ø18-25mm) top 1xM32 (blind cap) bottom	InA 40A RDF 0,6	9135551
		1	1	3	1xRCD 63A/4/0.03A (TYPE A 40AT)	1xMCB 16A 3p-C 3xMCB 16A 1p-C	1xM32 cable gland (ø18-25mm) top 1xM32 (blind cap) bottom	InA 32A RDF 0,5	9135510 
		1	1	3	1xRCD 63A/4/0.03A (TYPE A 40AT)	1xMCB 16A 3p-C 3xMCB 16A 1p-B	1xM32 (hole) top 1xM32 (blind cap) bottom	InA 32A RDF 0,5	9135552
		1	1	3	1xRCD 40A/4/0.03A (TYPE B 40AT)	1xMCB 16A 3p-C 3xMCB 16A 1p-C	1xM32 (hole) top 1xM32 (blind cap) bottom	InA 32A RDF 0,5	9135584
		1	1	4		1xMCB 32A 3p-C 1xMCB 16A 3p-C 4xMCB 16A 1p-B	1xM32 (hole) top 1xM32 (blind cap) bottom	InA 40A RDF 0,5	9135653
		1	1			1xMCB 32A 3p-C 1xMCB 16A 3p-C	1xM32 (hole) top 1xM32 (blind cap) bottom	InA 40A RDF 0,8	9135417
		2				2xMCB 32A 3p-C	1xM32 (hole) top 1xM32 (blind cap) bottom	InA 40A RDF 0,6	9135421
		1	1	3	1xRCD 63A/4/0.03A (TYPE A 40AT)	1xMCB 16A 3p-C 3xMCB 16A 1p-C	1xM32+M20 (hole) top 1xM32 cable gland bottom 1xM20 cable gland with cap bottom CAT6-socket RJ45 double + mounting set separate order	InA 32A RDF 0,5	9135585 + 12k452-0e 12k452-1/4
		1	1	2	1xRCD 63A/4/0.03A (TYPE A 40AT)	1 x MCB 16A 3p-C 2 x MCB 16A 1p-C 1 x MCB 6A 1p-B	1xM32 cable gland top 1xM32 (blind cap) bottom 1xUSB-charging socket with 2x USB Type A	InA 32A RDF 0,5	9135710

InA= Rated current of switchgear and control gear assembly; RDF = Rated diversity factor

 ...available on stock!



Thermoplastic insulated distribution boxes **DELTA[^]** Series LOFER7

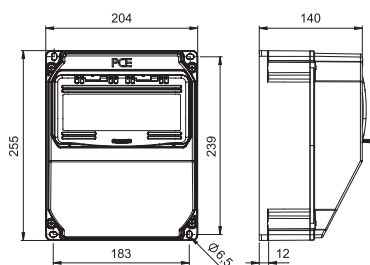

Series LOFER7

- **Socket outlet combination acc. EN 61439**
- Housing made of high durable PC/ABS, compact design
- **Dimensions HxWxD = 255x204x140 mm**
- Switchgear up to 9 modules, behind transparent window
- Ready wired for connection
- **IP54** (IP67 on request)

Standard version:

- All outer metal parts made out of stainless steel, captive screws
- Switchgear built in under impact resistant window
- Ready wired on main connecting terminal for wiring through
- Opening for cable gland on top, blind cap on bottom
- CEE-sockets and safety sockets made of PA6, contacts nickel plated, sockets individual exchangeable

Layout examples: (other combinations on request!)

Layout	CEE 400V 5p			SS 250V	Protection		Connection	InA RDF	Cat.No.
	63A	32A	16A	16A	RCD	MCB			
			1	2	1xRCD 40A/4/0.03A (TYPE A 25AT)	1xMCB 16A 3p-C 2xMCB 16A 1p-B	1xM25 (hole) top 1xM25 (blind cap) bottom	InA 25A RDF 0,7	9018112 
			1	2	1xRCD 40A/4/0.03A (TYPE A 25AT)	1xMCB 16A 3p-C 1xMCB 16A 1p-B	1xM25 (hole) top 1xM25 (blind cap) bottom	InA 25A RDF 0,7	9018114
		1		2	1xRCD 63A/4/0.03A (TYPE A 40AT)	1xMCB 32A 3p-C 2xMCB 16A 1p-B	1xM32 (hole) top 1xM32 (blind cap) bottom	InA 32A RDF 0,6	9018164
				4	1xRCD 40A/4/0.03A (TYPE A 25AT)	4xMCB 16A 1p-B	1xM25 (hole) top 1xM25 (blind cap) bottom	InA 25A RDF 0,7	9018012
		1	1			1xMCB 16A 3p-C	1xM25 (hole) top 1xM25 (blind cap) bottom	InA 32A RDF 0,6	9018088
			2			2xMCB 16A 3p-C	1xM25 (hole) top 1xM25 (blind cap) bottom	InA 32A RDF 0,8	9018161

Thermoplastic insulated distribution boxes DELTA[▲] Series LOFER4

Series LOFER4

- **Socket outlet combination**
- Housing made of high durable PC/ABS, compact design
- **Dimensions HxWxD = 255x204x114 mm**
- Ready wired for connection
- **IP54** (IP67 on request)


Standard version:

- All outer metal parts made out of stainless steel, captive screws
- Ready wired on main connecting terminal for wiring through
- Opening for cable gland on top, blind cap on bottom
- CEE-sockets and safety sockets made of PA6, contacts nickel plated, sockets individual exchangeable

9017101



9017009

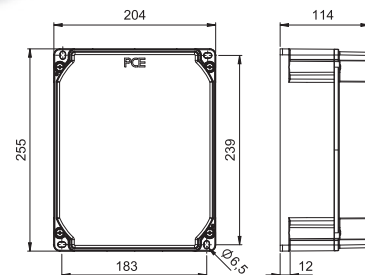

Layout examples: (other combinations on request!!)

Layout	CEE 400V 5p			SS 250V	Protection		Connection	VS	Cat.No.
	63A	32A	16A	16A	RCD	MCB			
				6			1xM20 (hole) top 1xM20 (blind cap) bottom	max. 16A	9017037
				8			2xM20 (cable gland ø10-14mm) top	max. 16A	9017009
			4				1xM25 (hole) top 1xM25 (blind cap) bottom	max. 16A	9017101

Thermoplastic insulated distribution boxes Series OPOLE

- **Socket outlet combination acc. EN 61439**
- Housing made of high durable PC/ABS, compact design
- **Dimensions HxWxD = 355x300x128mm**
- Switchgear up to 14 modules, behind transparent window
- Ready wired for connection
- Protective insulation via 4-way wall fastening outside of wiring space
- **IP54**

Layout examples: (other combinations on request!!)

Layout	CEE 400V 5p			SS 250V	Protection		Connection	InA RDF	Cat.No.
	63A	32A	16A	16A	RCD	MCB			
			3	5	1xRCD 63A/4/0.03A (TYPE A 40AT)	2xMCB 16A 3p-C 4xMCB 16A 1p-C	1 x M32 (Ø18-25mm) top	InA 40A RDF 0,5	45460101

VS = backup fuse; InA= Rated current of switchgear and control gear assembly; RDF = Rated diversity factor



Thermoplastic insulated distribution boxes **DELTA[▲]** Series MURAU/SCHWAZ




MURAU: 9013012

Series MURAU/SCHWAZ

- **Socket outlet combination acc. EN 61439**
- Housing made of high durable PC/ABS, compact design
- **Dimensions HxWxD = 255x204x114 mm**
- MURAU: Switchgear up to 4 modules, behind transparent window
- SCHWAZ: without window
- Ready wired for connection
- **IP54** (IP67 on request)


Standard version:

- All outer metal parts made out of stainless steel, captive screws
- Switchgear built in under impact resistant window
- Ready wired on main connecting terminal for wiring through
- Opening for cable gland on top, blind cap on bottom
- CEE-sockets and safety sockets made of PA6, contacts nickel plated, sockets individual exchangeable

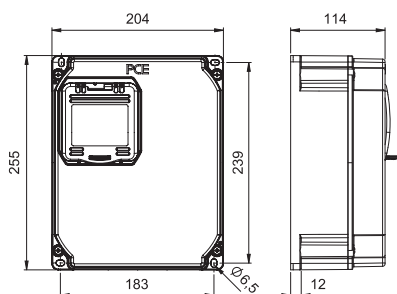

Layout examples: (other combinations on request!)

Layout	CEE 400V 5p			SS 250V	Protection		Connection	InA RDF	Cat.No.
	63A	32A	16A	16A	RCD	MCB			
				5	1xRCD 40A/4/0.03A (TYPE A 25AT)		1xM25 (hole) top 1xM25 (blind cap) bottom	InA 16A RDF 0,7	9013039
			1	3	1xRCD 40A/4/0.03A (TYPE A 25AT)		1xM25 (hole) top 1xM25 (blind cap) bottom	InA 16A RDF 0,7	9013031
			2	4			1xM20 (cable gland (ø10-14mm) top	VS max.16A	9014120-p

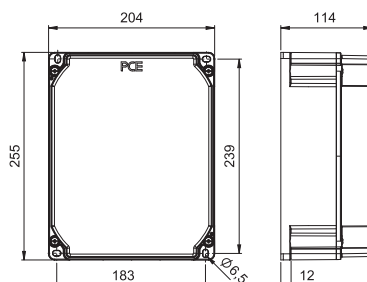

SCHWAZ: 9014120

InA= Rated current of switchgear and control gear assembly; RDF = Rated diversity factor


Thermoplastic insulated distribution boxes DELTA[▲] Series LECH

Series LECH

- **Socket outlet combination acc. EN 61439**
- Housing made of high durable, impact resistant PC
- **Dimensions HxWxD = 230x130x130 mm**
- Switchgear up to 6 modules, behind transparent window
- Ready wired for connection
- **IP54** (IP67 on request)

Standard version:

- All outer metal parts made out of stainless steel, captive screws
- Switchgear built in under impact resistant window
- Ready wired on main connecting terminal for wiring through
- Thread for cable gland 1xM25 on top, 2x break out openings M25 bottom
- CEE-sockets and safety sockets made of PA6, contacts nickel plated, sockets individual exchangeable



Layout examples: (other combinations on request!)

Layout	CEE 400V 5p			SS 250V	Protection		Connection	InA RDF	Cat.No.
	63A	32A	16A	16A	RCD	MCB			
			1	1		1xMCB 16A 1p-B	1xM25 (thread) top 2xM25 (break out) bottom	InA 16A RDF 0,5	9605105
		1		1		1xMCB 16A 1p-B	1xM25 (thread) top 2xM25 (break out) bottom	InA 32A RDF 0,8	9605351
			1	2		1xMCB 16A 3p-C 2xMCB 16A 1p-B	1xM25 (thread) top 2xM25 (break out) bottom	InA 32A RDF 0,8	9605153
			1	2		1xMCB 16A 3p-C 2xMCB 16A 1p-C	1xM25 (thread) top 2xM25 (break out) bottom	InA 32A RDF 0,8	9605159
			1	2	1xRCD 40A/4/0.03A (TYPE A 25AT)	2xMCB 16A 1p-B	1xM25 (thread) top 2xM25 (break out) bottom	InA 16A RDF 0,5	9605150
		1		2		2xMCB 16A 1p-B	1xM25 (thread) top 2xM25 (break out) bottom	InA 32A RDF 0,6	9605056
		1		2	1xRCD 63A/4/0.03A (TYPE A 40AT)	2xMCB 16A 1p-B	1xM25 (thread) top 2xM25 (break out) bottom	InA 32A RDF 0,6	9605320
				3	1xRCD 40A/4/0.03A (TYPE A 25AT)		1xM25 (thread) top 2xM25 (break out) bottom	InA 16A RDF 0,8	9605010

InA= Rated current of switchgear and control gear assembly; RDF = Rated diversity factor

