



CEE PLUGS AND SOCKETS 1h FOR EMERGENCY POWER SUPPLY



Image: Rosenbauer International AG



According to DIN VDE 0100-551 Bbl 1 (VDE 0100-551 Bbl 1):2019-06, emergency power feeds with mobile power generators carried out by electrical engineering amateurs must use **1 o'clock** coded plugs and sockets (**CEE plugs and sockets 400V 5p 1h** up to max. 125A). For this purpose, an appliance plug must be used on the building side as well as the connection cable (plug and coupling) between the power generator and the feed-in with **1h** position.



CEE plugs and sockets 1h for emergency power supply

Plug IP44/54


SHARK

- 16A/32A 5p 1h >50V

pack. unit: 10



	16 Amp	32 Amp
Poles	5	5
a [mm]	134	155
b [mm]	98	109
c [mm]	61	70
K_cable Ø [mm]	8-16	11,5-22
SW [mm]	42	50
Cat.No.	015-1	025-1



Plug IP67


SHARK

- 16A/32A 5p 1h >50V

pack. unit: 10



	16 Amp	32 Amp
Poles	5	5
a [mm]	134	155
b [mm]	87	100
K_cable Ø [mm]	8-16	11,5-22
SW [mm]	42	50
Cat.No.	0152-1	0252-1



Connector IP44/54


SHARK

- 16A/32A 5p 1h >50V

pack. unit: 10



	16 Amp	32 Amp
Poles	5	5
a [mm]	145	168
b [mm]	89	99
K_cable Ø [mm]	8-16	11,5-22
SW [mm]	42	50
Cat.No.	215-1	225-1



Connector IP66/67


SHARK

- 16A/32A 5p 1h >50V

pack. unit: 10



	16 Amp	32 Amp
Poles	5	5
a [mm]	147	171
b [mm]	92	102
K_cable Ø [mm]	8-16	11,5-22
SW [mm]	42	50
Cat.No.	2152-1	2252-1

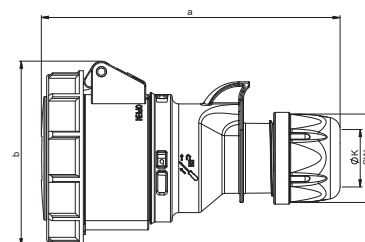


Plug IP66/67

POWER TWIST

• 63A 5p 1h >50V

pack. unit: 2

	63 Amp
Poles	5
a [mm]	250
b [mm]	115
K_cable Ø [mm]	14,5-36
SW [mm]	61
Cat.No.	035-1

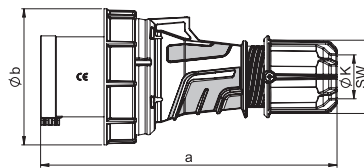


Connector IP66/67

POWER TWIST

• 63A 5p 1h >50V

pack. unit: 2

	63 Amp
Poles	5
a [mm]	269
b [mm]	114
K_cable Ø [mm]	14,5-36
SW [mm]	61
Cat.No.	235-1

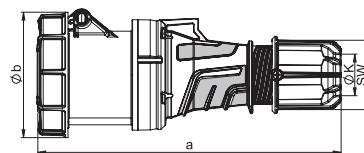


Wall mounted plug IP66/67

POWER TWIST

• 63A 5p 1h >50V

pack. unit: 10

	63 Amp
Poles	5
a [mm]	271
Height [mm]	175
Cat.No.	535-1



angle=15°




Wall mounted plug IP44

• 16A/32A 5p 1h >50V

pack. unit: 10

	16 Amp	32 Amp
Poles	5	5
a [mm]	122	132
Height [mm]	79	85
M [mm]	25	25
Cat.No.	515-1	525-1

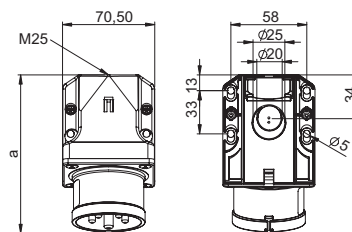

angle=15°




Wall mounted plug IP67

• 16A/32A 5p 1h >50V

pack. unit: 5

	16 Amp	32 Amp
Poles	5	5
a [mm]	140	152
Height [mm]	100	102
c [mm]	87	102
M* [mm]	25	25
Cat.No.	5152-1k	5252-1k

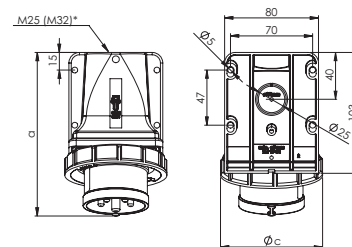

angle=15°



*M32 optional on request available

